

Paddle Blender



Double shaft paddle mixer is called no gravity mixer, too; it is widely applied in mixing powder and powder, granular and granular, granular and powder, and few liquids; it is used for food, chemical, pesticide, feeding stuff, and battery etc.

Main features

- **High active:** Rotate reversely and throw materials to different angles, mixing time 1-3min.
- **High uniformity:** Compact design and rotated shafts be filled with hopper, mixing uniformity up to 99%.
- **Low residue:** Only 2-5mm gap between shafts and wall, open-type discharging hole.

NO.295,NORTH SONGWEI ROAD,SHANGHAI 201613,CHINA

Tel: +86-21-34662727 Fax:+86-21-34630350 E-mail:sales@tops-group.com

- **Zero leakage:** Patent design and ensure the rotating axle & discharging hole w/o leakage.
- **Full clean:** Full weld and polishing process for mixing hopper, w/o any fastening piece like screw, nut.
- **Nice profile:** the whole machine is made by 100% stainless steel to make its profile elegant except bearing seat.

Specification


Model	Effective Volume(L)	Coefficient	Power (KW)	Rotate speed (R/min)	Dimension(mm)	Weight
TPW-300	300	0.4-0.6	4	53	1648*1006*1042	600
TPW-500	500	0.4-0.6	7,5	53	2068*1006*1155	800
TPW-1000	1000	0.4-0.6	11	45	2290*1250*1300	1150
TPW-1500	1500	0.4-0.6	15	45	2314*1600*1630	1500
TPW-2000	2000	0.4-0.6	18,5	39	2420*2000*1630	2800
TPW-3000	3000	0.4-0.6	22	39	2520*2300*1780	4300

Advantages

The mixing paddle



The pneumatic discharging device

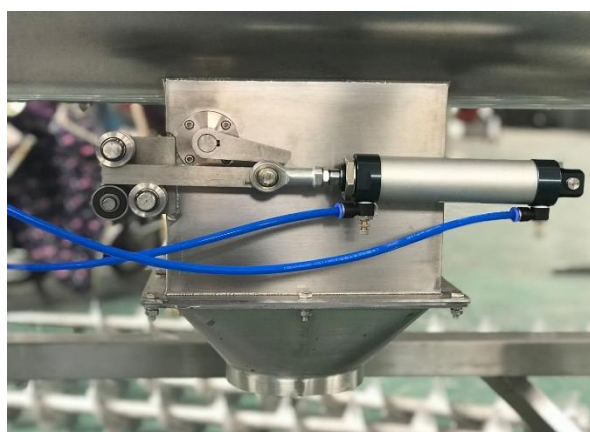

NO.295,NORTH SONGWEI ROAD,SHANGHAI 201613,CHINA

Tel: +86-21-34662727 Fax:+86-21-34630350 E-mail:sales@tops-group.com

The discharge port from
the inside of the mixer



The discharge port from
the outside of the mixer



NO.295,NORTH SONGWEI ROAD,SHANGHAI 201613,CHINA

Tel: +86-21-34662727 Fax:+86-21-34630350 E-mail:sales@tops-group.com